


# SELF GRIPPING CLAMPS - TENDEURS AUTO FERMANTS

The self gripping clamps can be used whenever a cable or a bare wire (made of aluminium, aluminium-steel, copper, steel even if insulating or OPGW - optical fiber ground wire) has to be stretched.

This product is made in alloyed high strength hot forged steel, in order to have a very low weight against with the working load applicable to it.

The galvanization treatment on the surface gives protection from oxidation, whereas the grease-fitting put on the biggest clamps, enable an easy lubrication of pins and guarantee a perfect and constant work in the long.

The plus of this item is the use of interchangeable couples of liners enabling the operator to vary the conductor diameter without changing the clamps, even on conductors of different material, which means working at lower cost on several projects.

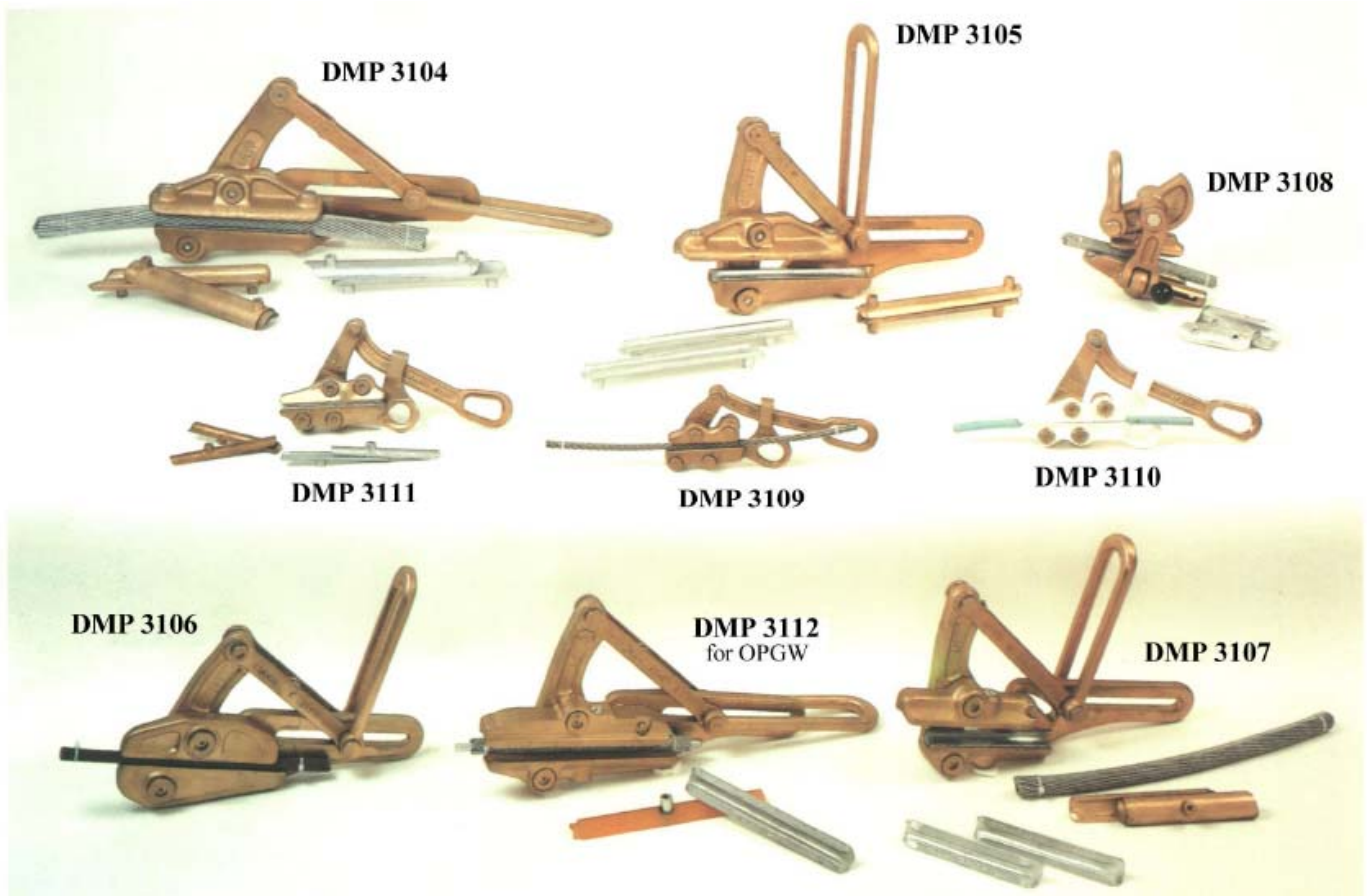

| MODEL   | MAX SAFETY LOAD<br>CHARGE<br>MAX DE SURETE<br>(kg) | MIN BREAKING LOAD<br>CHARGE<br>MIN.DE RUPTURE<br>(kg) | INTER-CHANGEABLE LINERS<br>FOURRURES<br>INTERCHANGEABLE | ALLUMINIUM<br>ACSR-COPPER<br>CONDUCTOR<br>CONDUCTEURS<br>(mm) | STEEL<br>CONDUCTOR<br>EARTWIRE<br>(mm) | ANTITWIST<br>BRAIED<br>ROPE<br>CABLE<br>ANTI<br>PIVOTANT<br>(mm) | WEIGHT<br>POIDS<br>(kg) |
|---------|--|---|---|---|--|--|-------------------------|
| DMP3109 | 2000   | 5000  | NO  | 2.5 ÷ 15  | 2.5 ÷ 15                               | 8 ÷ 10   | 1.5                     |
| DMP3110 | 2000   | 6000  | NO  | ONLY FOR INSULETED WIRES 6 ÷ 13                               |  |  | 2.1                     |
| DMP3106 | 5000   | 12500   | NO  | 7.5 ÷ 18  | 7.5 ÷ 18                               | 8 ÷ 13   | 7                       |
| DMP3111 | 2000   | 6000  | YES   | 7 ÷ 16  | 7 ÷ 13                                 | 7 ÷ 13   | 2.5                     |
| DMP3107 | 5000   | 12500   | YES   | 6 ÷ 23  | 6 ÷ 16                                 | 6 ÷ 16   | 7                       |
| DMP3105 | 9000   | 22500   | YES   | 12 ÷ 31.5   | 8 ÷ 24                                 | 8 ÷ 24   | 13.5                    |
| DMP3104 | 12000  | 27500   | YES   | 23 ÷ 41   | 10 ÷ 32                                | 8 ÷ 26   | 17                      |
| DMP3112 | 5000   | 12500   | YES   | FOR POWG 6 ÷ 23 mm  |  |  | 7                       |
| DMP3108 | 4000   | 10000   | YES   | LIFTING SUSPENSION CONDUCTOR 7 ÷ 38 mm                        |  |  | 7                       |

D.M.P. s.r.l.

Via Pericle, 5 - 20126 Milano / Tel. +390227000786 - Fax +390227000796

Email: [info@dmp-italy.com](mailto:info@dmp-italy.com) - <http://www.dmp-italy.com>

Descrizioni, dimensioni e pesi non sono impegnativi; Descriptions, dimensions and weights are not binding;

Cette documentation est indicative sujette à modifications sans préavis